

Spectrum™ Technology Platform

Version 12.1 S41

Spectrum™ Technology Platform Release Notes


This document contains information about Spectrum™ Technology Platform 12.1 S41. You have access only to the modules you have licensed. To evaluate any other modules, contact your Pitney Bowes account executive for a trial license key.

Who should apply this update? This product update is intended for the users of **Validate Address Global** stage in the **Universal Addressing Module**.

Is this update required? This product update is mandatory.

Contents:

What's New	2
Installation	2

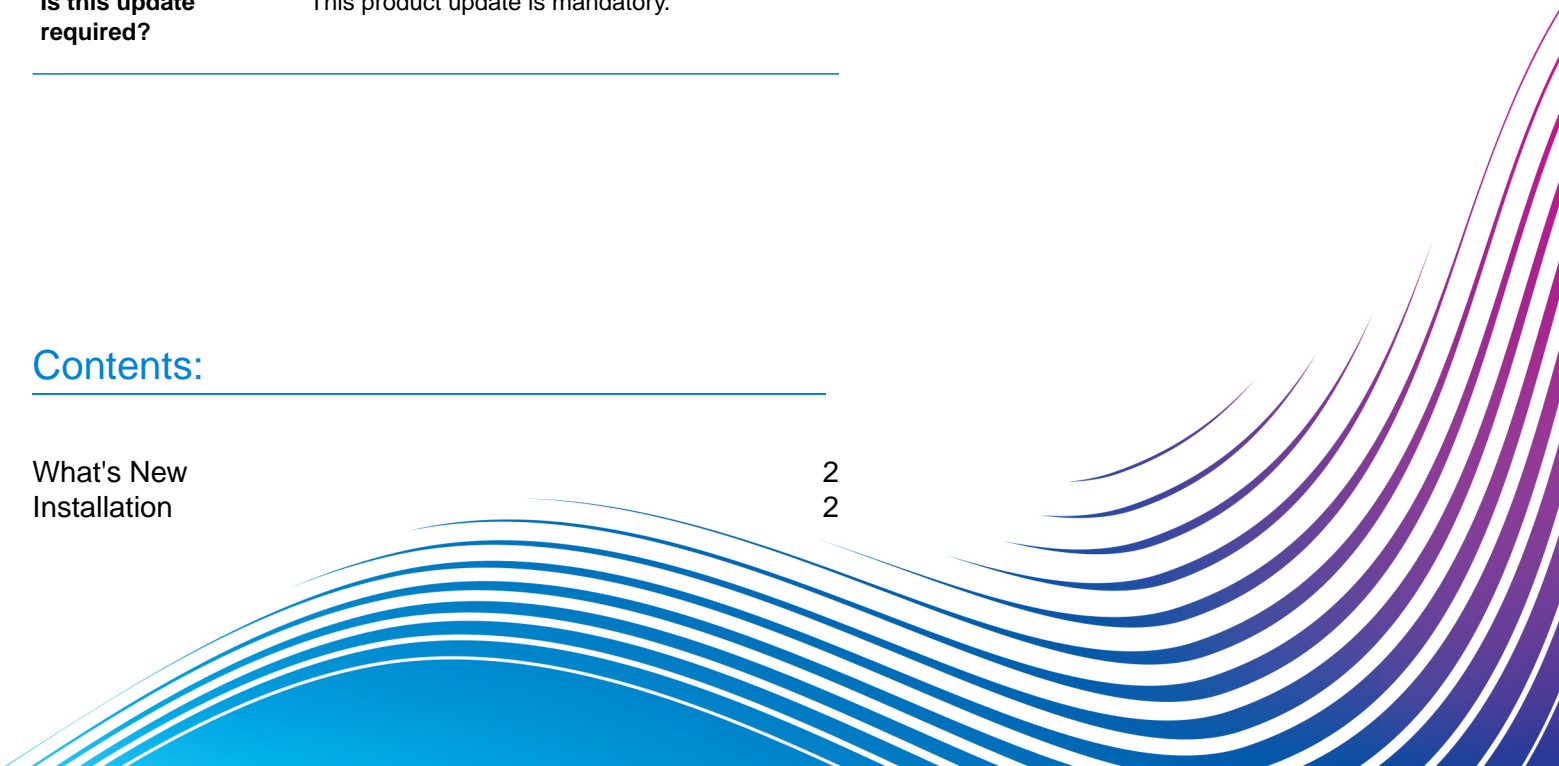

What's New

(CDQE-80579) The 12.1 S41 product update upgrades the Validate Address Global library to version 5.15.0.

Installation

To install this product update you must have Spectrum™ Technology Platform 12.1 installed.

Important: Before you install this product update, be sure that you have installed all previously-released product updates for your modules and the platform. Unexpected issues may occur if you do not install product updates in the proper order. For a listing of product updates for each module and the platform, see the [Product Update Summary](#) on support.pb.com/spectrum.

Applying this product update to a cluster

To apply this product update to a cluster, install the product update to each node by following the instructions in these release notes. You can apply the product update to one node at a time without stopping all the nodes in the cluster.

- [Installing on Windows](#) on page 2
- [Installing on Unix or Linux](#) on page 3

Installing on Windows

In this procedure, *SpectrumLocation* refers to the folder where you have installed the Spectrum™ Technology Platform server.

1. Stop the Spectrum™ Technology Platform server. To stop the server, right-click the Spectrum™ Technology Platform icon in the Windows system tray and select **Stop Spectrum™**. Alternatively, you can use the Windows Services control panel and stop the Pitney Bowes Spectrum™ Technology Platform service.
2. Back up this file to a different location:
`SpectrumLocation/server/modules/addressglobal/lib`
3. Delete this file:
`SpectrumLocation/server/modules/addressglobal/lib/addressdoctor-<any previous version>.jar`

4. Download the zip file containing the patch from the Pitney Bowes eStore.
5. Extract the contents of the zip file to a temporary location.
6. Extract the resulting zip file (`cdq1210S41.zip`) to the folder where you installed Spectrum. For example, `C:\Program Files\Pitney Bowes\Spectrum`. Choose to overwrite the existing files.
7. Start the Spectrum™ Technology Platform server. To start the server, right-click the Spectrum™ Technology Platform icon in the Windows system tray and select **Start Server**. Alternatively, you can use the Windows Services control panel to start the Pitney Bowes Spectrum™ Technology Platform service.

Installing on Unix or Linux

In this procedure, *SpectrumLocation* refers to the directory where you have installed the Spectrum™ Technology Platform server.

This update contains platform-specific libraries for non-Windows platforms. Please use the tar file that corresponds to your platform.

Platform	Tar File
AIX	<code>cdq1210S41_aix.tar</code>
LINUX	<code>cdq1210S41_linux.tar</code>
Solaris	<code>cdq1210S41_solaris.tar</code>

Note: **HP_Itanium** and **Solaris 10** operating systems are no longer supported.

1. Source the `SpectrumLocation/server/bin/setup` script.
2. Run the `SpectrumLocation/server/bin/server.stop` script to stop the Spectrum™ Technology Platform server.
3. Back up this file to a different location:
`SpectrumLocation/server/modules/addressglobal/lib`
4. Delete this file:
`SpectrumLocation/server/modules/addressglobal/lib/addressdoctor-<any previous version>.jar`
5. Download the zip file containing the patch from the Pitney Bowes eStore and extract the contents to a temporary location.
6. FTP the `cdq1210S41_<your-platform-specific>.tar` file in binary mode to a temporary directory on the Spectrum™ Technology Platform machine.
7. Change directory to the \$G1DCG directory.
8. Untar the file using this command:

```
tar -xvf TemporaryDirectory/cdq1210S41_<your platform-specific>.tar
```

9. Run the *SpectrumLocation*/server/bin/server.start script to start the Spectrum™ Technology Platform server.

```
INFO [Server] Pitney Bowes Spectrum(TM) Technology Platform (Version  
version) Started
```



3001 Summer Street
Stamford CT 06926-0700
USA

www.pitneybowes.com